
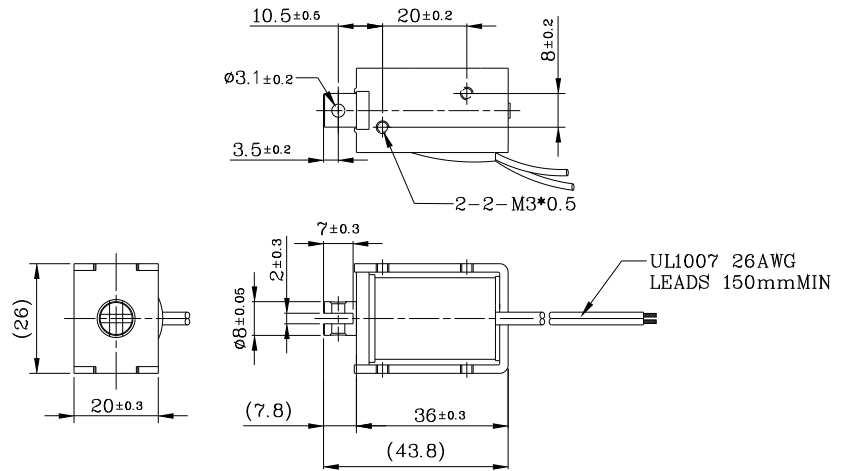


MTO-0837L Open Frame Solenoids

Plunger Weight 可動鐵心重量: 14g
 Total Weight 總重量: 112g


Shown Energized 通電狀態
 UNIT 單位:mm

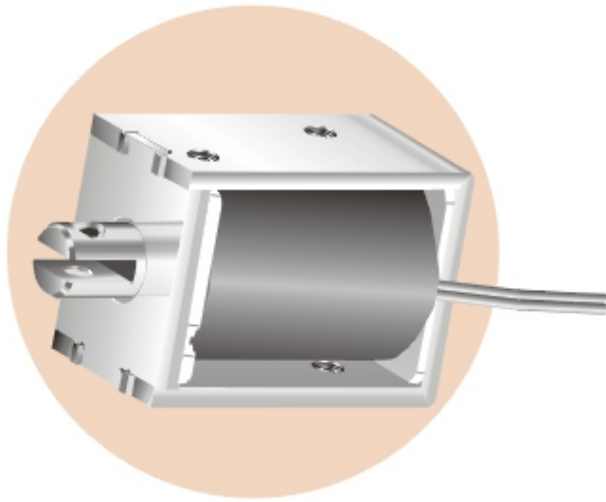

COIL DATA線圈資料

$\text{Duty Cycle (\%)} = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ 作動週期 (%) = $\frac{\text{ON時間}}{\text{ON時間} + \text{OFF時間}} \times 100\%$			Continuous(100%) 連續(100%)	Or less(50%) 間斷(50%)	Or less(25%) 間斷(25%)	Or less(10%) 間斷(10%)
MAX. "on" time in seconds 最大ON時間(秒)			∞	100	36	7
Watts at 20°C 瓦特數(w)(在20°C)			4	8	16	40
Ampere-turns at 20°C A值(在20°C)			666	941	1332	2106
Type No.	Resistance(20°C) Ω ±10%	No. Turns	Volts DC (電壓)			
型號	阻值(Ω)±10%	繞線圈數				
MTO-0837LAA	9	1000	6	8.5	12	19
	36	2000	12	17	24	38
	144	4000	24	34	48	76
	576	7540	48	68	96	152

行程 / 吸引力
STROKE Vs FORCE

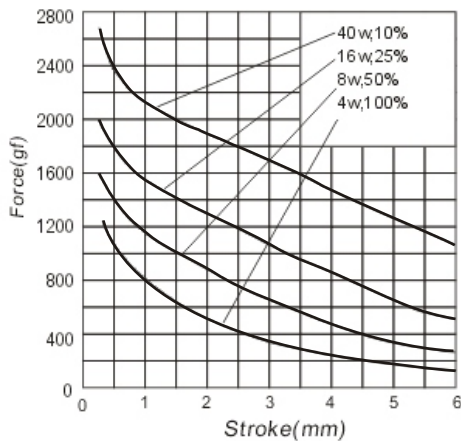

安-匝 / 吸引力
AMPERE-TURNS Vs FORCE

