
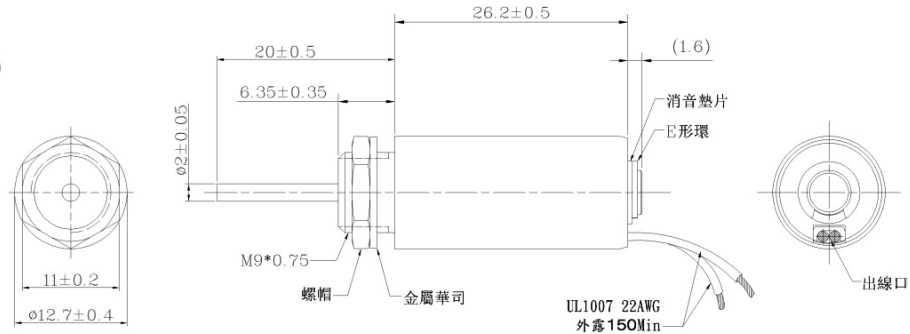


MTT-1325H Tubular Solenoids

Plunger Weight 可動鐵心重量: 5g
Total Weight 總重量: 30g


Shown Energized 通電狀態
UNIT 單位:mm

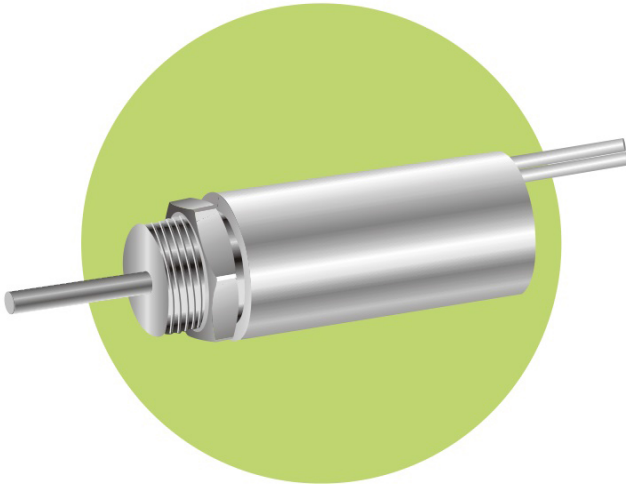

COIL DATA線圈資料

$\text{Duty Cycle (\%)} = \frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ $\text{作動週期 (\%)} = \frac{\text{On時間}}{\text{ON時間} + \text{OFF時間}} \times 100\%$			Continuous(100%) 連續(100%)	Or less(50%) 間斷(50%)	Or less(25%) 間斷(25%)	Or less(10%) 間斷(10%)
MAX. "on" time in seconds 最大 ON 時間 (秒)			∞	50	5	2
Watts at 20°C 瓦特數 (w) (在20°C)			4	8	16	40
Ampere-turns at 20°C At值 (在20°C)			453	640	905	1440
Type No.	Resistance(20°C) Ω ±10%	No. Turns	Volts DC (電壓)			
型號	阻值(Ω)±10%	繞線圈數				
MTT-1325HAA	9	680	6	8.5	12	19
	36	1359	12	17	24	38
	144	2700	24	34	48	76
	576	5400	48	68	96	152

行程 / 吸引力
STROKE Vs FORCE

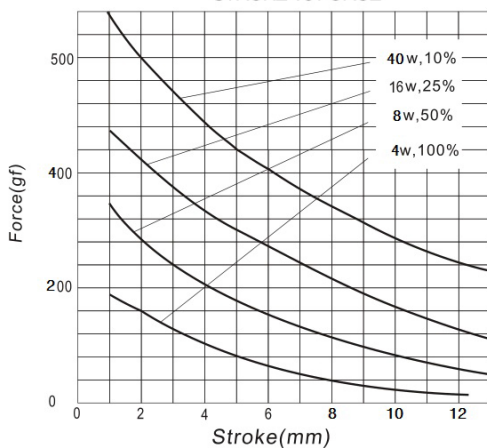

安-匝 / 吸引力
AMPERE-TURNS Vs FORCE

