
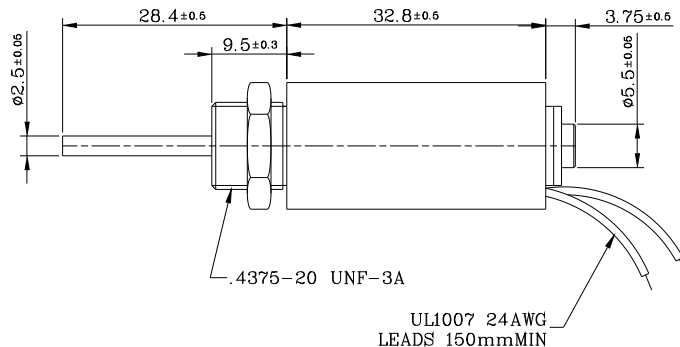


# MTT-1632H Tubular Solenoids

Plunger Weight 可動鐵心重量: 6.5g  
Total Weight 總重量: 47g


Shown Energized 通電狀態  
UNIT 單位:mm

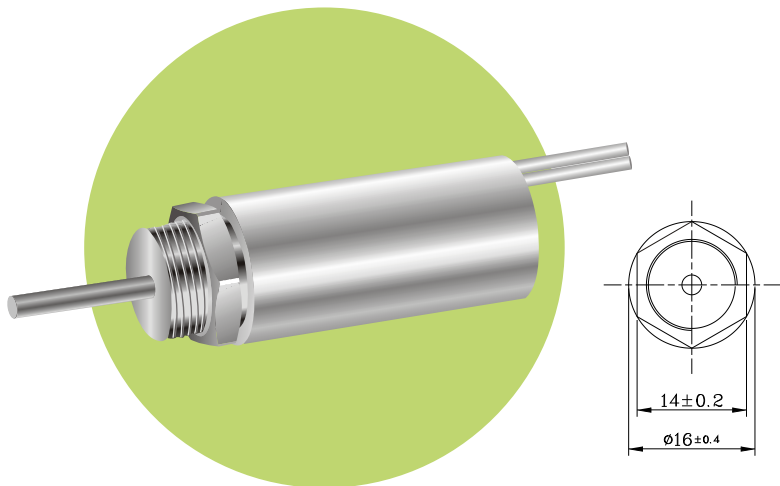

## COIL DATA線圈資料

Duty Cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ 作動週期 (%) = $\frac{\text{ON時間}}{\text{ON時間} + \text{OFF時間}} \times 100\%$		Continuous(100%) 連續(100%)	Or less(50%) 間斷(50%)	Or less(25%) 間斷(25%)	Or less(10%) 間斷(10%)	
MAX. "on" time in seconds 最大 ON 時間 (秒)		∞	230	25	6	
Watts at 20°C 瓦特數 (w) (在20°C)		5.5	11	22	55	
Ampere-turns at 20°C At值 (在20°C)		738	1046	1476	2338	
Type No.	Resistance(20°C) Ω ±10%	No. Turns	Volts DC (電壓)			
型號	阻值(Ω)±10%	繞線圈數				
MTT-1632HAA	6.5	800	6	8.5	12	19
	26.2	1600	12	17	24	38
	104.7	3200	24	34	48	76
	419	6200	48	68	96	152

行程 / 吸引力  
STROKE Vs FORCE

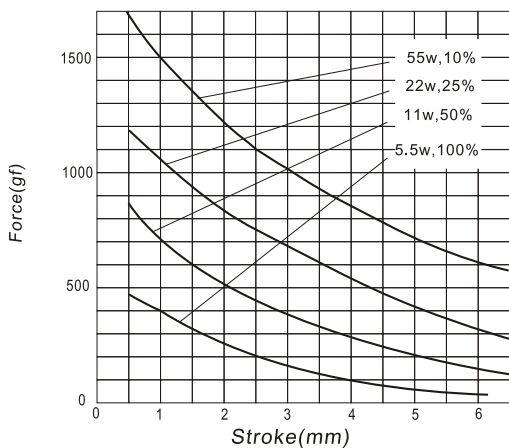

安-匝 / 吸引力  
AMPERE-TURNS Vs FORCE

