
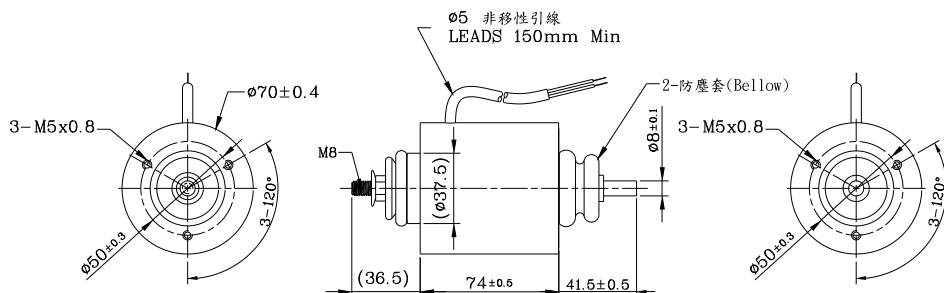


# MTT-7074H Tubular Solenoids

Plunger Weight 可動鐵心重量: 326g  
 Total Weight 總重量: 1931g


Shown Energized 通電狀態  
 UNIT 單位:mm

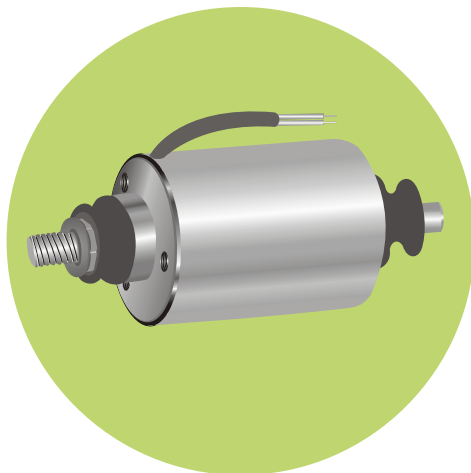

## COIL DATA線圈資料

Duty Cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ 作動週期 (%) = $\frac{\text{ON時間}}{\text{ON時間} + \text{OFF時間}} \times 100\%$			Continuous(100%) 連續(100%)	Or less(50%) 間斷(50%)	Or less(25%) 間斷(25%)	Or less(10%) 間斷(10%)
MAX. "on" time in seconds 最大 ON 時間 (秒)			$\infty$	80	36	16
Watts at 20°C 瓦特數 (w) (在20°C)			36	72	144	360
Ampere-turns at 20°C At值 (在20°C)			2580	3655	5160	8170
Type No.	Resistance(20°C) $\Omega \pm 10\%$	No. Turns	Volts DC (電壓)			
型號	阻值( $\Omega$ )±10%	繞線圈數				
MTT-7074HAA	1.0	430	6	8.5	12	19
	4.0	900	12	17	24	38
	16.0	1790	24	34	48	76
	64.0	3300	48	68	96	152

行程 / 吸引力  
STROKE Vs FORCE

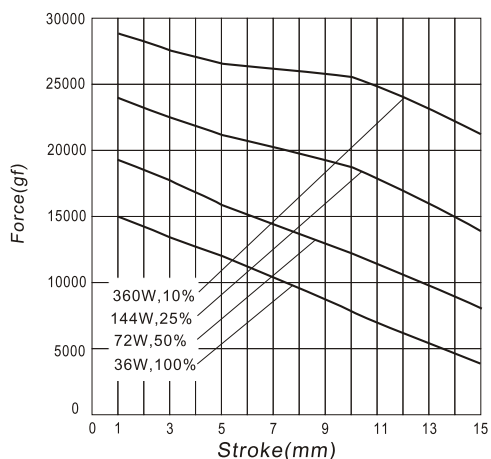

安-匝 / 吸引力  
AMPERE-TURNS Vs FORCE

